


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G02B 13/14, 27/00	A1	(11) International Publication Number: WO 98/19196 (43) International Publication Date: 7 May 1998 (07.05.98)
(21) International Application Number: PCT/US97/19439 (22) International Filing Date: 24 October 1997 (24.10.97) (30) Priority Data: 60/030,099 31 October 1996 (31.10.96) US (71) Applicant: RAYTHEON TI SYSTEMS, INC. [US/US]; 2501 South Highway 121, Lewisville, TX 75067 (US). (72) Inventor: KLOCEK, Paul; 16090 Old Pond Drive, Dallas, TX 75248 (US). (74) Agent: MILLS, Jerry, W.; Baker & Botts, L.L.P., 2001 Ross Avenue, Dallas, TX 75201-2980 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>

(54) Title: INFRARED LENS ASSEMBLY WITH ATHERMALIZATION ELEMENT AND METHOD

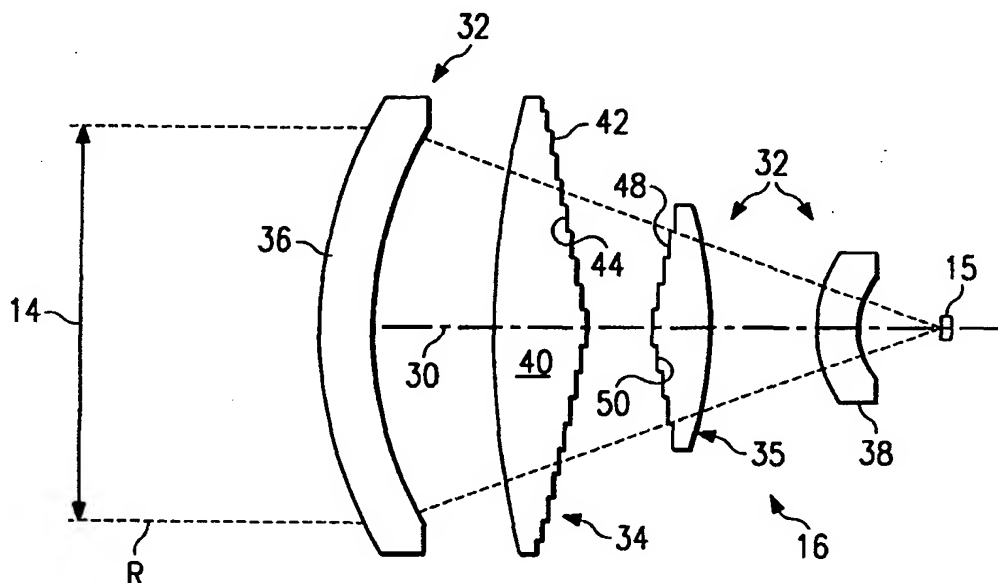

(57) Abstract

An infrared lens assembly may comprise a lens set (32) including one or more refractive lenses. The refractive lens may be positioned along an optic axis (30) to receive infrared radiation. The lens set (32) may be designed to focus infrared radiation of a scene (14) at an image plane (15). An athermalization element (34) may be positioned along the optic axis (30) in optical communication with the lens set (32). The athermalization element (34) may include an infrared transmitting member (40) supporting a diffractive pattern (42). The infrared transmitting member (40) may comprise an infrared transmitting polymer. The diffractive pattern (42) may compensate for temperature induced changes in a focal length of the lens set (32) to maintain infrared radiation of the scene (14) in focus at the image plane (15).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

1

INFRARED LENS ASSEMBLY WITH ATHERMALIZATION
ELEMENT AND METHOD

TECHNICAL FIELD OF THE INVENTION

This invention relates generally to infrared systems, and more particularly to an infrared lens assembly with an athermalization element and method.

5

BACKGROUND OF THE INVENTION

Infrared or thermal imaging systems are often used to detect fires, overheating machinery, planes, vehicles and people. Thermal imaging systems may also be employed to control temperature sensitive industrial processes. In a thermal imaging system, infrared or thermal radiation may be detected by a plurality of thermal sensors. The thermal sensors typically detect thermal radiance differences between various objects in a scene and display these differences as a visual image of the scene.

The basic components of a thermal imaging system generally include optics for collecting and focusing infrared radiation from a scene, an infrared detector having a plurality of thermal sensors for converting infrared radiation to an electrical signal, and electronics for amplifying and processing the electrical signal into a visual display or for storage in an appropriate medium. A chopper is often included in a thermal imaging system to modulate the infrared radiation and to produce a constant background radiance which provides a reference signal. The electronic processing portion of the thermal imaging

system will subtract the reference signal from the total radiance signal to produce a signal with minimum background bias.

5 Thermal imaging systems may use a variety of infrared detectors. An infrared detector is a device that responds to electromagnetic radiation in the infrared spectrum. Infrared detectors are sometimes classified into two main categories as cooled and uncooled. A cooled infrared detector is an infrared detector that must be operated at
10 cryogenic temperatures, such as the temperature of liquid nitrogen, to obtain the desired sensitivity to variations in infrared radiation. Cooled detectors typically employ thermal sensors having small bandgap semiconductors that generate a change in voltage due to photoelectron
15 interaction. This latter effect is sometimes called the internal photoelectric effect.

Uncooled infrared detectors cannot make use of small bandgap semiconductors because dark current swamps any signal at room temperature. Consequently, uncooled
20 detectors rely on other physical phenomenon and are less sensitive than cooled detectors. However, because uncooled detectors do not require the energy consumption of cooled detectors, they are the preferred choice for portable, low power, applications where the greater sensitivity of cooled
25 detectors is not needed. In a typical uncooled thermal detector, infrared photons are absorbed and the resulting temperature difference of the absorbing element is detected. Thermal detectors include pyroelectric detector, a thermocouple, or a bolometer.

30 Infrared radiation is generally focused onto a thermal detector by an infrared lens system. A problem with infrared lenses is that the focal length of the lenses may vary with changes in temperature. Consequently, the image

of the scene may be focused forward or rearward of the thermal detector to create a blurred image.

SUMMARY OF THE INVENTION

5 Accordingly, a need has arisen in the art for an improved infrared lens assembly. The present invention provides an athermalization element that substantially eliminates or reduces the disadvantages and problems associated with prior infrared lens assemblies.

10 In accordance with the present invention, an infrared lens assembly may comprise a lens set including one or more refractive lenses. The refractive lens may be positioned along an optic axis to receive infrared radiation. The lens set may be designed to focus infrared radiation of a
15 scene at an image plane. An athermalization element may be positioned along the optic axis in optical communication with the lens set. The athermalization element may include an infrared transmitting member supporting a diffractive pattern. The infrared transmitting member may comprise an
20 infrared transmitting polymer. The diffractive pattern may compensate for temperature induced changes in a focal length of the lens set to maintain infrared radiation of the scene in focus at the image plane.

 In one embodiment, for example, increasing
25 temperatures may shorten the focal length of the lens set. In response to the temperature increase, the polymer of the infrared transmitting member may expand to alter the diffractive pattern. The altered diffractive pattern may lengthen a focal length of the athermalization element to
30 offset the shortening of the focal length of the lens set. Conversely, temperature decreases may lengthen the focal length of the lens set. In response to the temperature decrease, the polymer of the infrared transmitting member may contract to alter the diffractive pattern. The altered

diffractive pattern may shorten the focal length of the athermalization element to offset the lengthening of the focal length of the lens set.

5 In one embodiment, a color correction element may be positioned along the optic axis. The color correction element may be in optical communication with the lens set and the athermalization element. The color correction element may comprise a diffractive surface to correct color
10 aberrations of the lens set and the athermalization element. In a particular embodiment, the diffractive surface of the color correction element may be formed on the infrared transmitting member opposite the diffractive pattern of the athermalization element.

15 Important technical advantages of the present invention include providing an improved infrared lens assembly. In particular, a passive athermalization element may compensate for temperature induced changes in the focal length of a lens to maintain infrared radiation of a scene in focus with a thermal detector. Accordingly, the image
20 generated by the thermal detector will not become blurred due to temperature variations.

Still another important technical advantage of the present invention includes providing a relatively low cost athermalization element for an infrared lens assembly. The
25 athermalization element may be a polymer lens having a diffractive pattern. Additionally, the athermalization element may be stationary within the lens assembly. Accordingly, the athermalization element may be inexpensively fabricated and mounted within the lens
30 assembly.

Other technical advantages will be readily apparent to one skilled in the art from the following figures, descriptions, and claims.

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention, and the advantages thereof, reference is now made to the following description taken in conjunction with the accompanying drawings, in which:

FIGURE 1 is a block diagram of an infrared imaging system with a lens assembly having an athermalization element in accordance with the present invention;

FIGURE 2 is a schematic drawing illustrating one embodiment of the lens assembly of FIGURE 1;

FIGURE 3 is a schematic drawing illustrating another embodiment of the lens assembly of FIGURE 1; and

FIGURE 4 is a schematic drawing illustrating yet another embodiment of the lens assembly of FIGURE 1.

DETAILED DESCRIPTION OF THE INVENTION

The preferred embodiments of the present invention and its advantages are best understood by referring now to FIGURES 1 through 4 of the drawings, in which like numerals refer to like parts throughout the several views. FIGURE 1 shows a schematic block diagram of an infrared imaging system 12 for detecting, processing, and displaying the heat image of an object 14. The infrared imaging system 12 may be used to detect fires, overheating machinery, planes, vehicles and people, and to control temperature sensitive industrial processes.

As shown by FIGURE 1, the infrared imaging system 12 may comprise a lens assembly 16 in optical communication with an infrared detector 18. The infrared detector 18 may sense infrared radiation, typically, in the spectral bands from 3 to 5 microns (having an energy of 0.4 to 0.25 eV) or from 8 to 14 microns (having an energy of 0.16 to 0.09 eV). The 3-5 micron spectral band is generally termed the "near infrared band" while the 8 to 14 micron spectral band is

termed the "far infrared band." Infrared radiation between the near and far infrared bands cannot normally be detected due to atmospheric absorption.

5 The lens assembly 16 may focus or direct infrared radiation emitted by the object 14 onto an image plane 15 of the infrared detector 18. In cases where an uncooled detector 18 is used, a chopper 20 is often disposed between the lens assembly 16 and the infrared detector 18. The chopper 20 may be controlled by a signal processor 22 to
10 periodically interrupt transmission of the infrared image to the image plane 15 of the infrared detector 18. The chopper 20 may be a rotating disk with openings that periodically block and let pass infrared radiation.

The infrared detector 18 may translate incoming
15 infrared radiation into one or more images and corresponding electrical signals for processing. Electrical signals may be fed to the signal processor 22, which assembles electrical signals into video signals for display. As previously described, the signal processor 22
20 may also synchronize operation of the chopper 20. This synchronization enables the signal processor 22 to subtractively process incoming infrared radiation to eliminate both fixed infrared background radiation and time constant noise. The output of the signal processor 22 is
25 often a video signal that may be viewed, further process, stored, or the like.

The video signal may be viewed on a local monitor 24 or fed to a remote monitor 26 for display. The local monitor 24 may be an eye piece containing an electronic
30 viewfinder, a cathode ray tube, or the like. Similarly, the remote monitor 26 may comprise an electronic display, a cathode ray tube, such as a television, or other type of device capable of displaying the video signal. The video signal may also be saved to a storage medium 28 for later

recall. The storage medium 28 may be a compact disk, a hard disk drive, random access memory, or any other type of medium capable of storing electronic video signals for later recall. Monitors and storage mediums are well known in the art and therefore will not be further described herein.

Electrical power to operate the infrared imager system 12 may be provided by a power supply 29. The power supply 29 may provide electrical power directly to the chopper 20, the infrared detector 18, the signal processor 22, and to the local monitor 24. Electrical power may also be provided to the lens 16, when, for example, a motor is employed to focus the lens 16.

FIGURE 2 is schematic drawing illustrating one embodiment of the lens assembly 16. As shown by FIGURE 2, the lens assembly 16 may be positioned along an optic axis 30 to focus infrared radiation emitted by the object 14 onto the image plane 15 of the infrared detector 18. The lens assembly 16 may comprise a lens set 32 and an athermalization element 34. The lens set 32 may include one or more refractive lenses and a color correction element 35. The refractive lenses may include an objective lens 36 and a collection lens 38.

In accordance with conventional practice, the radius of curvature of the lenses will be defined as positive if the center of curvature lies to the right of the lens and will be defined as negative if the center of curvature lies to the left of the lens along optic axis 30. A lens will be defined as converging if the lens focussing power causes parallel light rays to converge, and will be defined as diverging if the lens focussing power causes parallel light rays to appear to originate from a virtual focus. Further, a side of a lens will be defined as a first side if facing

the object 14 and defined as a second side if facing the image plane 15.

For the embodiment of FIGURE 2, the objective lens 36 and the collection lens 38 may both be positive converging lenses. In this embodiment, the lens assembly 16 may be generally described as a single field of view lens. It will be understood that the lens assembly 16 may be of another type capable of focusing infrared radiation emitted by the object 14 onto the image plane 15 of the infrared detector 18. For example, the lens assembly 16 may be a focusing zoom lens. It will be further understood that the lens assembly 16 may include additional, disparate, negative and/or diverging lenses within the scope of the present invention.

The objective lens 36 and the collection lens 38 may be formed of an infrared transmitting glass, such as Germanium, Gallium Arsenide (GaAs) or Chalcogenide glass. The Chalcogenide glass may be TI-1173, manufactured by Texas Instruments Incorporated. It will be understood that the objective and the collection lenses 36 and 38 may be formed of other types of glass or other materials capable of transmitting infrared radiation. For example, the lenses 36 and 38 may be formed of an infrared transmitting polymer. The preferred lens material may be a material most compatible with the configuration and make-up of the athermalization element 34 and of the color correction element 35.

A significant feature of the present invention is the construction of the athermalization element 34. The athermalization element 34 may passively athermalize the lens assembly 16 by compensating for temperature induced changes in a focal length of the lens set 32. Accordingly, the athermalization element 34 maintains infrared radiation

of the scene 14 in focus at the image plane 15 of the thermal detector 18.

The athermalization element 34 may comprise an infrared transmitting member 40 supporting a diffractive pattern 42. The infrared transmitting member 40 may be an infrared transmitting polymer. The infrared transmitting polymer may be polyethylene, polypropylene, or the like. Other infrared transmitting polymers are disclosed in U.S. Patent No. 5,532,048 and U.S. Patent No. 5,325,586. It will be understood that other types of infrared transmitting polymers may be used to form the infrared transmitting member 40 within the scope of the present invention.

For a given lens design and material and a given infrared transmitting polymer, the athermalization element 34 may be designed as follows for a desired temperature range. An optimum thermal expansion coefficient of the lens set 32 may first be determined. The optimum thermal expansion coefficient of the lens set 32, X_r , may be calculated by the following equation:

$$x_r = \alpha_r - \frac{1}{n_r - n_o} \left(\frac{dn_r}{dT} - n_r \frac{dn_o}{dT} \right)$$

where: α_r = thermal expansion of coefficient of lens set material

n_r = index of refraction of lens set material

$\frac{dn_r}{dT}$ = change in index of refraction of lens set versus temperature

n_o = index of medium surrounding lens set i.e., air

$\frac{dn_o}{dT}$ = change in index of medium surrounding lens set versus temperature

10

For example, using TI 1173 glass at a 10 micron wavelength, the optimum thermal expansion coefficient of the lens set 32 may be as follows:

5

$$X_r = 15 \times 10^{-6} - \frac{1}{2.6 - 1.0} (91 \times 10^{-6} - 2.6 (8.6 \times 10^{-7}))$$

$$X_r = -4.05 \times 10^{-5}$$

10

From the optimum thermal expansion coefficient of the lens set 32, a focus shift of the lens set 32 may next be calculated for the desired temperature range. The focus shift of the lens set 32, Δf_r , may be calculated by the following equation:

$$\Delta f_r = f_r \cdot x_r \cdot \Delta T$$

where: f_r = focal length of lens set

15

x_r = optimum thermal expansion coefficient of lens set

ΔT = desired temperature range

20

The temperature range may be 40°C, between 25°C and 65°C. It will be understood that the athermalization element may be designed for other temperature ranges within the scope of the present invention. Continuing the previous example, for a temperature range of 40°C and a focal length of four (4) inches, the focus shift of the TI 1173 glass lens set 32 may be as follows:

25

$$\Delta f_r = 4 (-4.34 \times 10^{-5}) 40$$

$$\Delta f_r = -6.94 \times 10^{-3} \text{ inch}$$

Thus, the focal length of the lens set 32 may shift toward itself by 0.00694 inches. To athermalize the lens set 32, the athermalization element 34 should have a focus shift of the same magnitude over the same temperature range, but in an opposite direction. Thus, the focus shift of the athermalization element 34 may be equal and opposite the focus shift of the lens set 32. Continuing the example, the focus shift of the athermalization element 34 may be $+6.94 \times 10^{-3}$ inch.

The focal length of the athermalization element 32, f_d , may be calculated from the following equation:

$$f_d = \frac{\Delta f_d}{X_d \cdot \Delta T}$$

$$f_d = \frac{+6.94 \times 10^{-3}}{X_d \cdot 40}$$

where: Δf_d = focus shift of athermalization element 34

x_d = optimum thermal expansion coefficient for athermalization element

ΔT = temperature range

As previously discussed, the focus shift and the temperature range are the same for the athermalization element 34 as for the lens set 32. The optimum thermal expansion coefficient for the athermalization element 34 may next be determined. The optimum thermal expansion coefficient of the athermalization element 34, x_d , may be calculated by the following equation:

$$x_d = 2 \alpha_d + \frac{1}{n_o} \frac{dn_o}{dT}$$

where: α_d = thermal expansion of the athermalization element material

n_o = index of medium surrounding athermalization element i.e., air

5 $\frac{dn_r}{dT}$ = change in index of medium surrounding athermalization element versus temperature

10

Continuing the example and using polyethylene polymer, the optimum thermal expansion coefficient of the athermalization element 34 may be as follows:

$$x_d = 2 (68 \times 10^{-6}) + \frac{1}{1} (-8.6 \times 10^{-7})$$

$$X_d = 1.35 \times 10^{-4}$$

15 Using $x_d = 1.35 \times 10^{-4}$, the focal length of the athermalization element 34 may be as follows:

$$f_d = \frac{6.48 \times 10^{-3}}{40 (1.35 \times 10^{-4})}$$

$$f_d = 1.2 \text{ inches}$$

20 Accordingly, using TI 1173 glass for the lens set 32 and polyethylene polymer for the athermalization element 34, the athermalization element 34 may have a focal length of 1.2 inches for a 40°C temperature range.

The diffractive pattern 42 of the athermalization element 34 may be formed on a second surface 44 of the infrared transmitting member 40. In one embodiment, the diffractive pattern 42 may be a series of concentric rings

25 46. The diffractive pattern 42 may be a kinoform surface, a binary surface, a phase plate or the like. It will be understood that the diffractive pattern 42 may be otherwise formed within the scope of the present invention.

30 A kinoform surface may be produced by diamond point turning, patterned and etched, or the like. Kinoforms are

5 diffractive elements whose phase modulation is introduced by a surface relief pattern. The diffractive optical surface results in a step function whose surface is cut back by precisely one wavelength of the light frequency of interest, every time their thickness increases by that amount. The general equation for a diffractive surface is:

$$Z = \frac{(CC) * Y^2}{1 + \text{SQRT}[1 - (1 + K) (CC)^2 Y^2]} + AY^4 + BY^6 + CY^8 + DY^{10} \\ + [HOR] * \left(\frac{C1Y^2 + C2Y^4 + C3Y^6}{(N1 - N2)} - \frac{\lambda}{N1 - N2} \right) \\ * \text{INT} \left(\frac{C1Y^2 + C2Y^4 + C3Y^6}{\lambda} \right)$$

where: Z is Sag value along the Z-axis or optical axis;

10 Y is the semi-diameter height;

CC is the base curvature (1/radius) of the surface;

K is the conic coefficient of surface;

15 A, B, C, and D are the 4th, 6th, 8th and 10th order aspheric coefficients, respectively;

HOR is the diffraction order, generally 1 or -1;

λ is the design wavelength for surface;

20 N1 is the Refractive index of material preceding diffractive surface;

N2 is the Refractive index of material following diffractive surface; and

C1, C2, and C3 are coefficients for describing aspheric phase departure.

25

Further information concerning kinoform diffractive surfaces is disclosed by commonly assigned U.S. Patent

Application Serial No. 08/181,263, filed January 13, 1994, and entitled "INFRARED CONTINUOUS ZOOM TELESCOPE USING DIFFRACTIVE OPTICS," which is hereby incorporated by reference.

5 In accordance with the invention, increasing temperatures may shorten the focal length of the lens set 32. In response to the temperature increase, the polymer of the infrared transmitting member 40 may expand to alter the diffractive pattern 42. The altered diffractive
10 pattern 42 may lengthen a focal length of the athermalization element 34 to offset the shortening of the focal length of the lens set 32. Conversely, temperature decreases may lengthen the focal length of the lens set 32. In response to the temperature decrease, the polymer of the
15 infrared transmitting member 40 may contract to alter the diffractive pattern 42. The altered diffractive pattern 42 may shorten the focal length of the athermalization element 34 to offset the lengthening of the focal length of the lens set 32.

20 The color correction element 35 may be positioned between the athermalization element 34 and the collection lens 38. The color correction element 35 may comprise a diffractive surface 48 formed on a first side 50. The diffractive surface 48 may correct axial and lateral color
25 focusing aberrations. The diffractive surface 48 may be a kinoform produced by diamond point turning, pattern etch or the like.

 FIGURE 3 is a schematic drawing of an infrared lens assembly 60 incorporating another embodiment of the present
30 invention. In this embodiment, the lens assembly 60 may be positioned along an optic axis 61 to focus infrared radiation omitted by the object 14 onto the image plane 15 of the infrared detector 18. The lens assembly 60 may comprise a lens set 62 and an athermalization element 64.

The lens set 62 may include one or more refractive lenses and a color correction element 65. The refractive lenses may include an objective lens 66 and a collection lens 68. The athermalization element 64 may include an infrared transmitting member 70 supporting a diffractive pattern 72. The color correction element 65 may include a diffractive surface 74.

For the embodiment of FIGURE 3, the lens set 62 and the athermalization element 64 may be formed as previously described in connection with FIGURE 2. The diffractive surface 74 of the color correction element 65 may be formed on a first side 76 of the infrared transmitting member 70. Accordingly, the diffractive surface 74 of the color correction element 65 may be opposite the diffractive pattern 72 of the athermalization element 64.

FIGURE 4 is a schematic drawing of an infrared lens assembly 80 incorporating still another embodiment of the present invention. In this embodiment, the lens assembly 80 may be positioned along an optic axis 81 to focus infrared radiation omitted by the object 14 onto the image plane 15 of the infrared detector 18. The lens assembly 80 may comprise a lens set 82 and an athermalization element 84. The lens set 82 may include one or more refractive lenses and a color correction element 85. The refractive lenses may include an objective lens 86 and a collection lens 88. The athermalization element 84 may include an infrared transmitting member 90 supporting a diffractive pattern 92. The color correction element 85 may include a diffractive surface 94.

For the embodiment of FIGURE 4, the lens set 82 and the athermalization element 84 may be formed as previously described in connection with FIGURE 2. The diffractive pattern 92 of the athermalization element 84 may comprise the diffractive surface 94 of the color correction element

85. Accordingly, the diffractive pattern 92 may maintains infrared radiation of the scene 14 in focus at the image plane 15 and may also correct axial and lateral color focusing aberrations.

5 Although the present invention has been described with several embodiments, various changes and modifications may be suggested to one skilled in the art. It is intended that the present invention encompass such changes and modifications as fall within the scope of the appended
10 claims.

WHAT IS CLAIMED IS:

1. An infrared lens assembly, comprising:
 - a lens set including one or more refractive lenses;
 - 5 the lens set positioned along an optic axis to receive infrared radiation;
 - the lens set designed to focus infrared radiation of a scene at an image plane;
 - an athermalization element positioned along the optic axis in optical communication with the lens set;
 - 10 the athermalization element comprising an infrared transmitting member supporting a diffractive pattern;
 - the infrared transmitting member comprising an infrared transmitting polymer; and
 - 15 the diffractive pattern configured to compensate for temperature induced changes in a focal length of the lens set to maintain infrared radiation of the scene in focus at the image plane.
2. The infrared lens assembly of Claim 1, wherein the athermalization element is stationary along the optic axis.
- 25 3. The infrared lens assembly of Claim 1, further comprising:
 - a focal length of the lens set shortening in response to a temperature increase;
 - the polymer of the infrared transmitting member
 - 30 expanding in response to the temperature increase to alter the diffractive pattern; and
 - the altered diffractive pattern operable to lengthen a focal length of the athermalization element to offset the shortening of the focal length of the lens set.

4. The infrared lens assembly of Claim 1, further comprising:

a focal length of the lens set lengthening in response to a temperature decrease;

5 the polymer of the infrared transmitting member contracting in response to the temperature decrease to alter the diffractive pattern; and

10 the altered diffractive pattern operable to shorten a focal length of the athermalization element to offset the lengthening of the focal length of the lens set.

5. The infrared lens assembly of Claim 1, further comprising the diffractive pattern formed on a surface of the infrared transmitting member.

15

6. The infrared lens assembly of Claim 1, the diffractive pattern further comprising a series of concentric rings formed on a surface of the infrared transmitting member.

20

7. The infrared lens assembly of Claim 1, the diffractive pattern further comprising a kinoform formed on a surface of the infrared transmitting member.

25

8. The infrared lens assembly of Claim 1, the lens set further comprising:

a color correction element positioned along the optic axis in optical communication with the refractive lens and the athermalization element; and

30

the color correction element comprising a diffractive surface to correct color aberrations of the refractive lens and the athermalization element.

9. The infrared lens assembly of Claim 8, further comprising:

the diffractive pattern of the athermalization element formed on a surface of a side of the infrared transmitting member; and

the diffractive surface of the color correction element formed on an opposite side of the infrared transmitting member.

10. The infrared lens assembly of Claim 8, further comprising:

the diffractive pattern of the athermalization element formed on a surface of the infrared transmitting member; and

the diffractive pattern comprising the diffractive surface of the color correction element.

11. An infrared imaging system, comprising:
an infrared detector including an image plane
positioned along an optic axis;
a lens set comprising one or more refractive
5 lenses;
the lens set positioned along the optic axis to
receive infrared radiation;
the lens set designed to focus infrared radiation
of a scene at the image plane;
10 an athermalization element positioned along the
optic axis in optical communication with the lens set;
the athermalization element comprising an
infrared transmitting member supporting a diffractive
pattern;
15 the infrared transmitting member comprising an
infrared transmitting polymer; and
the diffractive pattern configured to compensate
for temperature induced changes in a focal length of the
lens set to maintain infrared radiation of the scene in
20 focus at the image plane.

12. The infrared imaging system of Claim 11, wherein
the athermalization element is stationary along the optic
axis.

13. The infrared imaging system of Claim 11, further comprising:

5 a focal length of the lens set shortening in response to a temperature increase;

the polymer of the infrared transmitting member expanding in response to the temperature increase to alter the diffractive pattern; and

10 the altered diffractive pattern operable to lengthen a focal length of the athermalization element to offset the shortening of the focal length of the lens set.

14. The infrared imaging system of Claim 11, further comprising:

15 the focal length of the lens set lengthening in response to a temperature decrease; and

the polymer of the infrared transmitting member contracting in response to the temperature decrease to alter the diffractive pattern; and

20 the altered diffractive pattern operable to shorten a focal length of the athermalization element to offset the lengthening of the focal length of the lens set.

25 15. The infrared imaging system of Claim 11, further comprising the diffractive pattern formed on a surface of the infrared transmitting member.

30 16. The infrared imaging system of Claim 11, the diffractive pattern further comprising a series of concentric rings formed on a surface of the infrared transmitting member.

17. The infrared imaging system of Claim 11, the diffractive pattern further comprising a kinoform formed on a surface of the infrared transmitting member.

5 18. The infrared imaging system of Claim 11, the lens set further comprising:

 a color correction element positioned along the optic axis in optical communication with the refractive lens and the athermalization element; and

10 the color correction element comprising a diffractive surface to correct color aberrations of the refractive lens and the athermalization element.

 19. The infrared imaging system of Claim 18, further comprising:

 the diffractive pattern of the athermalization element formed on a surface of a side of the infrared transmitting member; and



20 the diffractive surface of the color correction element formed on an opposite side of the infrared transmitting member.

20. A method of athermalizing an infrared lens assembly, comprising the steps of:

transmitting infrared radiation of a scene through a lens set including one or more refractive lenses positioned along an optic axis;

transmitting infrared radiation of the scene through an infrared transmitting member positioned along the optic axis in optical communication with the refractive lens;

adjusting a polymer of the infrared transmitting member in response to a temperature change to alter a diffractive pattern of the infrared transmitting member to compensate for temperature induced changes in a focal length of the lens set to maintain infrared radiation of the scene in focus at an image plane.

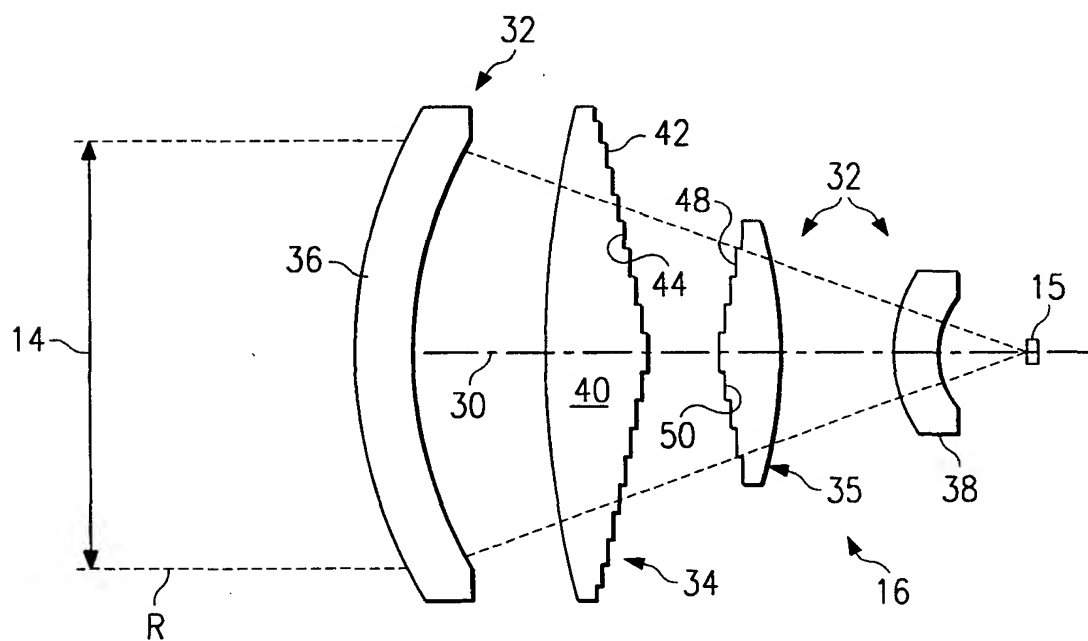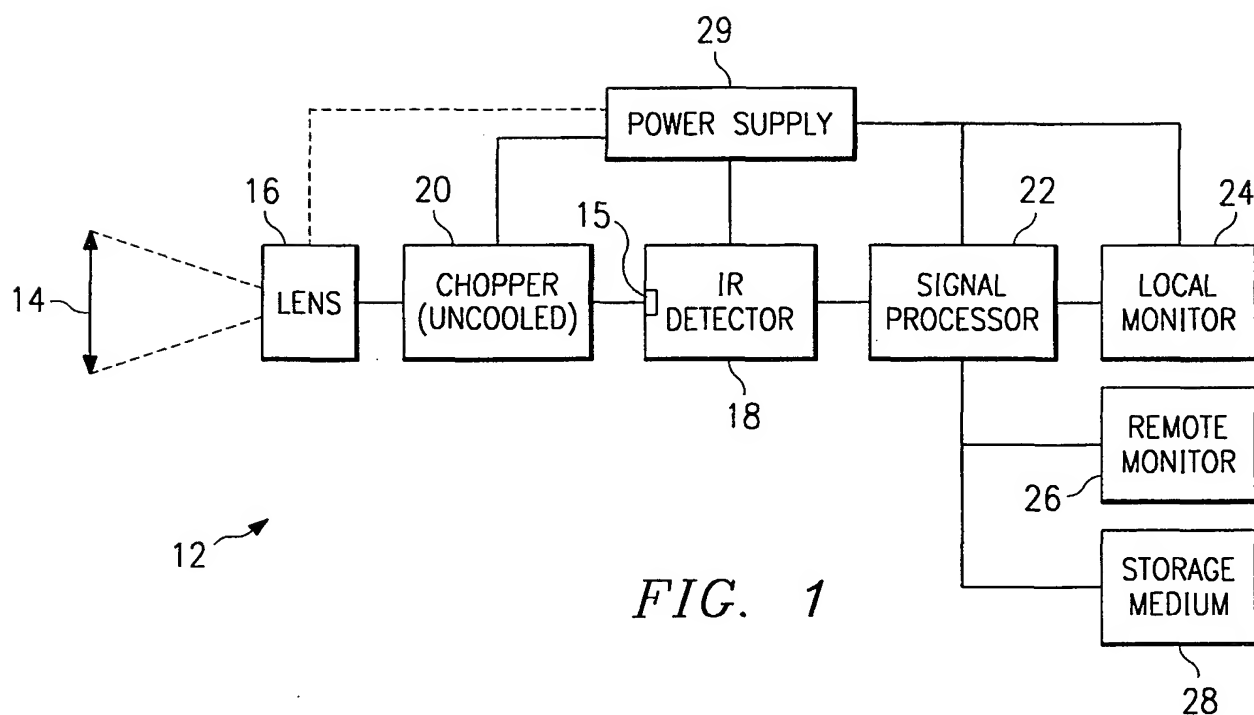

2/2

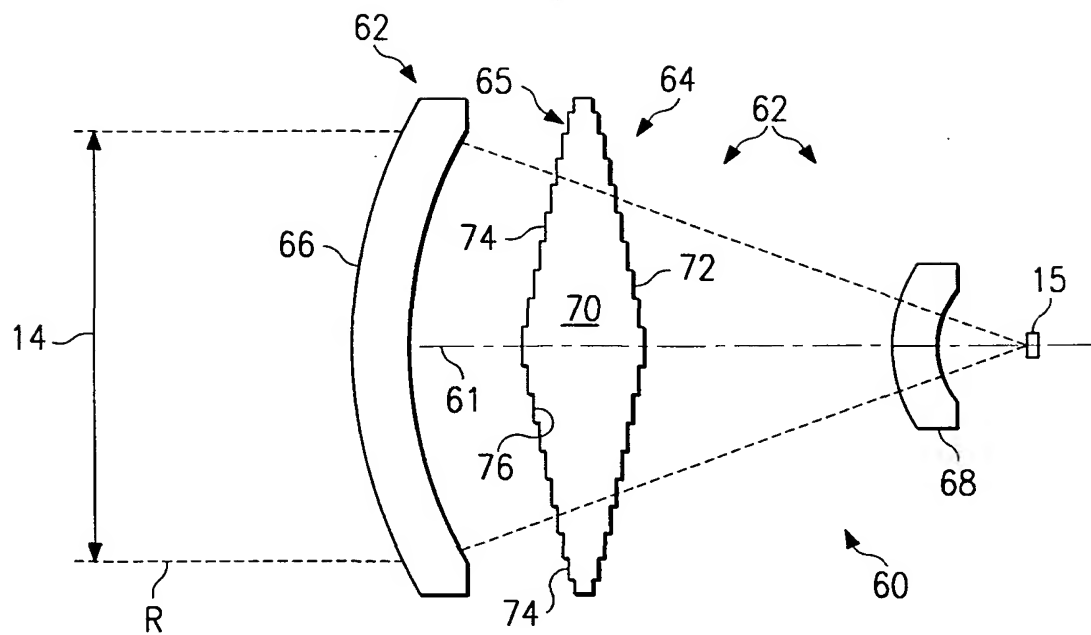


FIG. 3

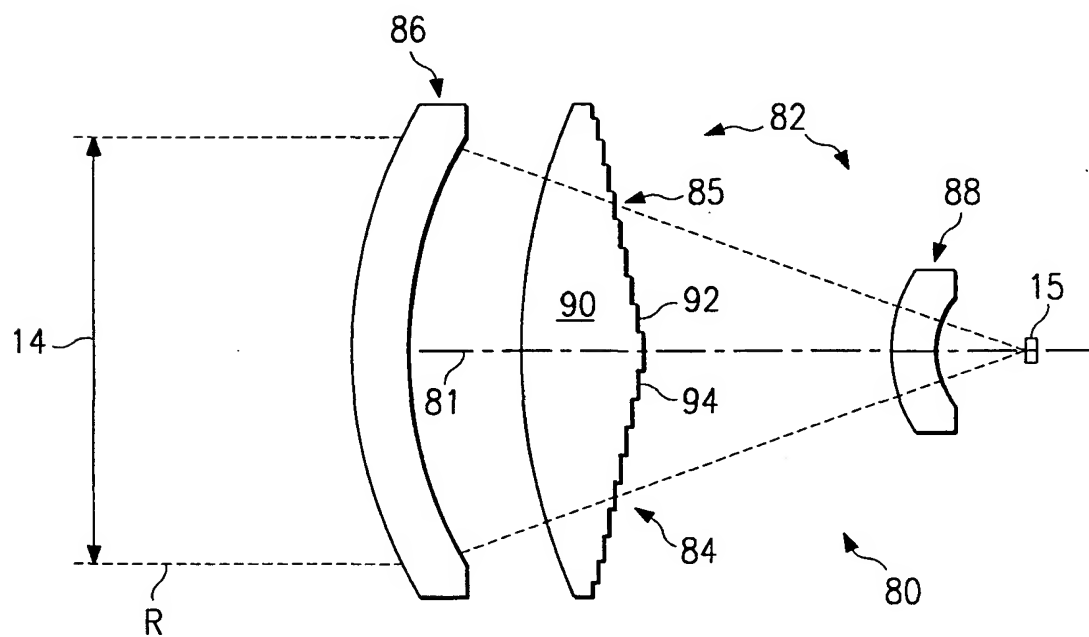


FIG. 4

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 97/19439

A. CLASSIFICATION OF SUBJECT MATTER IPC 6 G02B13/14 G02B27/00		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 6 G02B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 260 828 A (LONDONO CARMINA ET AL) 9 November 1993 see column 3, line 20 - column 16, line 50; figures 1-17 ---	1-20
A	US 5 202 792 A (ROLLIN JOEL) 13 April 1993 see column 2, line 54 - column 9, line 57; figures 1-6 ---	1-4,8, 11-14, 18,20
A	US 5 504 628 A (BORCHARD JOSEPH F) 2 April 1996 see column 3, line 23 - column 4, line 67; figures 1,2 --- -/--	1-4,8, 11-14, 18,20
<div style="display: flex; justify-content: space-between;"> <input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex. </div>		
<div style="display: flex;"> <div style="flex: 1;"> <p>° Special categories of cited documents :</p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="flex: 1;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&" document member of the same patent family</p> </div> </div>		
Date of the actual completion of the international search <div style="text-align: center;">4 March 1998</div>		Date of mailing of the international search report <div style="text-align: center;">12/03/1998</div>
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer <div style="text-align: center;">THEOPISTOU, P</div>

INTERNATIONAL SEARCH REPORT

Inte onal Application No
PCT/US 97/19439

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 493 441 A (CHIPPER ROBERT B) 20 February 1996 cited in the application see column 1, line 33 - column 4, line 34; figures 1-3 -----	8,10,18
A	US 5 299 062 A (OGATA SHIRO) 29 March 1994 see column 2, line 30 - column 4, line 10; figures 1-6 -----	1,5,6, 8-11,15, 16,18,19
A	US 5 532 048 A (KLOCEK PAUL ET AL) 2 July 1996 cited in the application see column 1, line 60 - column 2, line 57 -----	1,11

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 97/19439

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5260828 A	09-11-93	CA 2128328 A EP 0632905 A JP 7505235 T WO 9320464 A	14-10-93 11-01-95 08-06-95 14-10-93
US 5202792 A	13-04-93	FR 2667695 A EP 0480805 A JP 6027368 A	10-04-92 15-04-92 04-02-94
US 5504628 A	02-04-96	JP 8043727 A	16-02-96
US 5493441 A	20-02-96	JP 7311346 A	28-11-95
US 5299062 A	29-03-94	JP 4016910 A	21-01-92
US 5532048 A	02-07-96	US 5324586 A	28-06-94